OUTDOOR LIGHTING

EVO HYDE 180 C



GENERAL

EVO HYDE 180 C

Article number	110250100
Category	indirect
Light source	LED
Color changing	no
Warranty	5 years

DIMENSIONS

Length	180 mm / 7.09”
Width	16 mm / 0.63”
Height	22 mm / 0.87”
Diameter	-
Total height	-
Recess depth	-

ELECTRONICS

Voltage	12V AC
Output	1.0 Watt
VA	1.0
Power factor	1
Light source	12x SMD-LED 0.06W
Lifetime	25000 hours
Energy label	G
Dimmable	no
Length of cable lead	600 mm / 24’’

LIGHT SPECIFICATIONS

Color temperature	2850 K
CRI (RA)	93
Luminous intensity	17.30 Cd
Light beam 0-180	64°
Light beam 90-270	91°
Net luminous flux	28 lumen
Luminous efficiency	28 lumenwatt

MATERIAL

Ring Plate	-
Lens	acrylic (PMMA)
Exterior	aluminium
Easy Lock included	yes
Installation hardware included	yes

AVAILABLE PRODUCT COLORS


■ Black


AVAILABLE ACCESSORIES

FIX 3, FIX 4

PROTECTION RATING


IP : 53

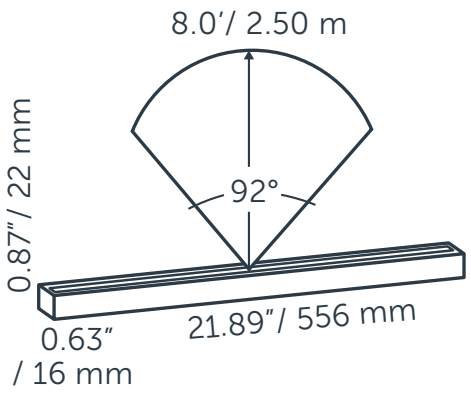

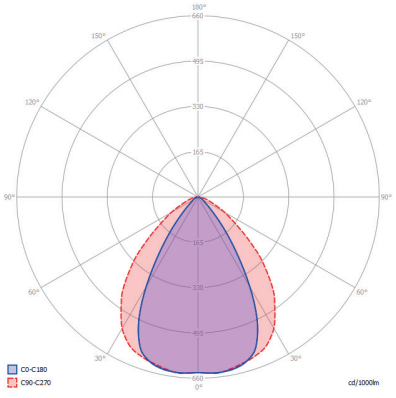


in-lite®

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
3	3.06	2.5
1	4.29	3.5
1	5.52	4.5
1	6.74	5.5
0	7.97	6.5
0	9.19	7.5




Beam angle (0-180°): 63°
edge illuminance is 1/2 of Centre beam

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
3	5.00	2.5
1	7.00	3.5
1	9.00	4.5
1	11.00	5.5
0	13.00	6.5
0	15.00	7.5

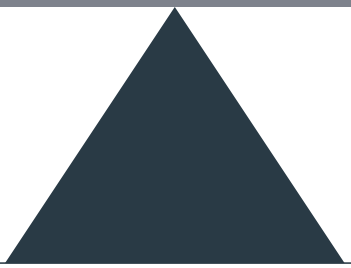

Beam angle (90-270°): 90°
edge illuminance is 1/2 of Centre beam

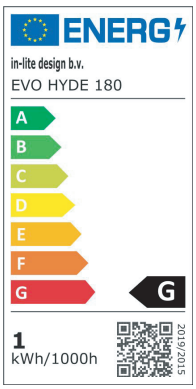

12 VOLT

CRI 90

c UL us LISTED

in-lite®