EVO HYDE 550



GENERAL

EVO HYDE 550

Article number	10250150
Category	surface
Light source	LED
Color changing	no
Warranty	5 years

DIMENSIONS

Length	556 mm / 21.89”
Width	16 mm / 0.63”
Height	22 mm / 0.87”
Diameter	-
Total height	-
Recess depth	-

ELECTRONICS

Voltage	12V AC
Output	2.00 Watt
VA	2.10
Power factor	0.95
Light source	45x SMD-LED 0.06W
Lifetime	25000 hours
Dimmable	no
Length of cable lead	600 mm / 24’’

LIGHT SPECIFICATIONS

Color temperature	2950 K
CRI (RA)	96
Luminous intensity	61.30 Cd
Light beam 0-180	62°
Light beam 90-270	92°
Net luminous flux	91 lumen
Luminous efficiency	46 lumenwatt

MATERIAL

Ring Plate	-
Lens	acrylic (PMMA)
Exterior	aluminum
Easy Lock included	yes
Installation hardware included	yes

AVAILABLE PRODUCT COLORS


■ Black


AVAILABLE ACCESSORIES

FIX 5

PROTECTION RATING

IP : 53

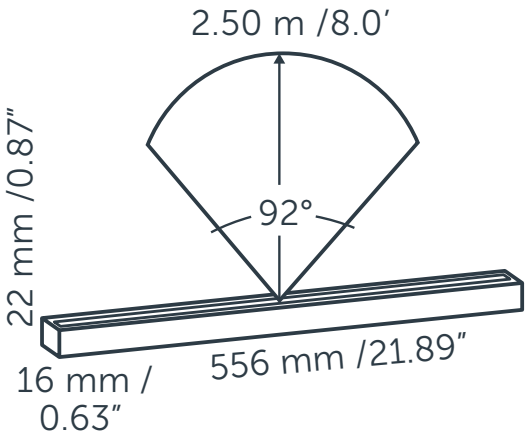

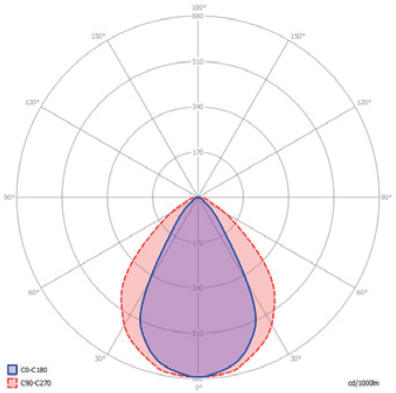


in-lite®

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
10	3.00	2.5
2	6.01	5.0
1	9.01	7.5
1	12.02	10.0
0	15.02	12.5
0	18.03	15.0




Beam angle (0-180°): 62°
edge illuminance is 1/2 of Centre beam

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
10	5.18	2.5
2	10.36	5.0
1	15.53	7.5
1	20.71	10.0
0	25.89	12.5
0	31.07	15.0

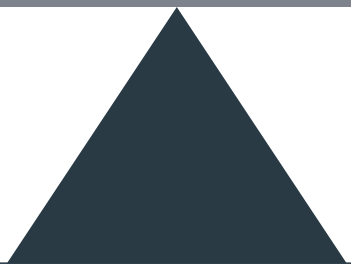

Beam angle (90-270°): 92°
edge illuminance is 1/2 of Centre beam

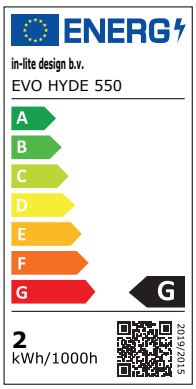

12 VOLT

CRI 90

c UL us LISTED

in-lite®