WEDGE SLIM



GENERAL

WEDGE SLIM

Article number	10301770
Category	wall
Light source	LED
Color changing	no
Warranty	5 years

DIMENSIONS

Length	35 mm / 1.38”
Width	200 mm / 7.87”
Height	50 mm / 1.97”
Diameter	-
Total height	-
Recess depth	-

ELECTRONICS

Voltage	12V AC
Output	1.00 Watt
VA	1.00
Power factor	1.00
Light source	12x SMD-LED 0.06W
Lifetime	25000 hours
Dimmable	no
Length of cable lead	600 mm / 24’’

LIGHT SPECIFICATIONS

Color temperature	2800 K
CRI (RA)	96
Luminous intensity	16.70 Cd
Light beam 0-180	80°
Light beam 90-270	106°
Net luminous flux	36 lumen
Luminous efficiency	36 lumenwatt

MATERIAL

Ring Plate	-
Lens	polycarbonate
Exterior	aluminum
Easy Lock included	yes
Installation hardware included	yes

AVAILABLE PRODUCT COLORS


■ Dark Grey


AVAILABLE ACCESSORIES

-

PROTECTION RATING


IP : 55

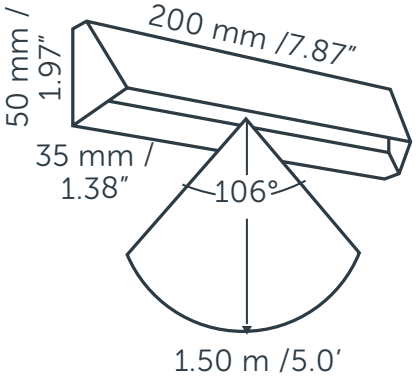

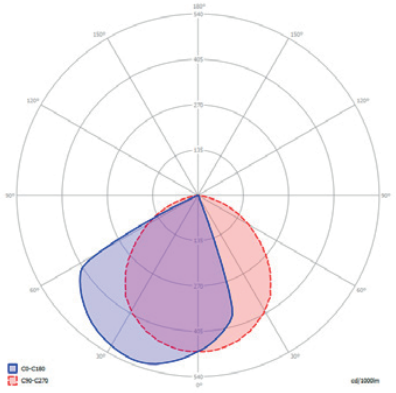


in-lite®

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
7	2.69	1.6
3	4.03	2.4
2	5.37	3.2
1	6.71	4.0
1	8.06	4.8
1	9.40	5.6

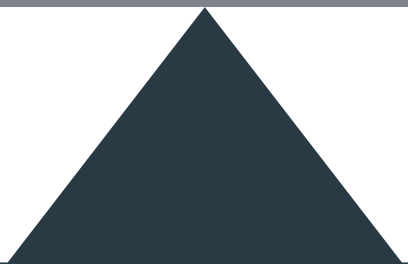


Beam angle (0-180°): 80°
edge illuminance is 1/2 of Centre beam

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
7	4.25	1.6
3	6.37	2.4
2	8.49	3.2
1	10.62	4.0
1	12.74	4.8
1	14.86	5.6

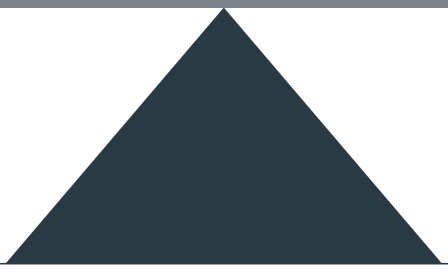

Beam angle (90-270°): 106°
edge illuminance is 1/2 of Centre beam

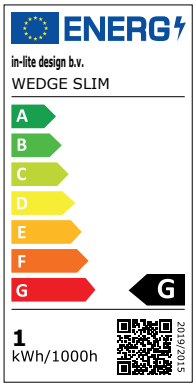

12 VOLT

CRI 90

c UL us LISTED

in-lite®